



# AEGIS


## Anti-Entrapment Shield

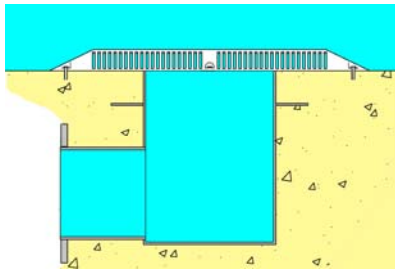

SUMP WITH SHIELD

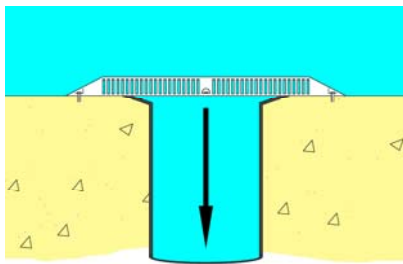


NO SUMP WITH SHIELD

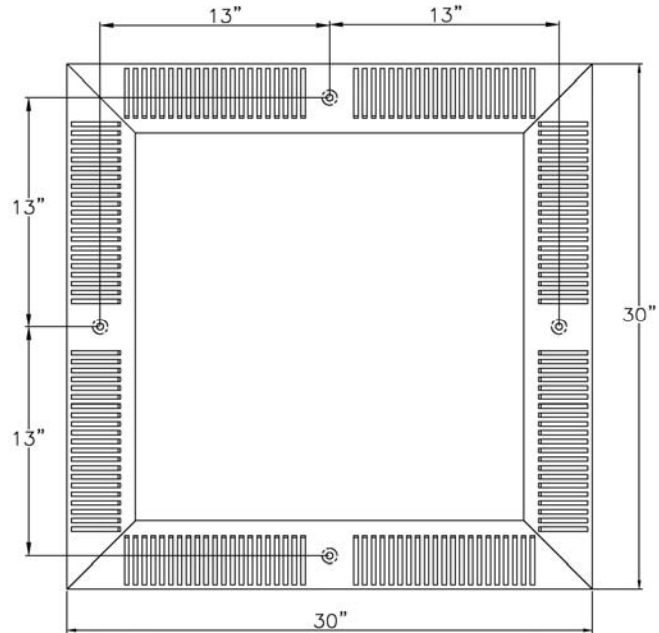

### Notes:

- ASME A112.19.8.a-2008 VGB-2008 & NSF Certified
- Easily installed over existing main drains
- Prevents bather entrapment
- Fiberglass construction
- No bonding required
- Slip resistant surface
- Includes stainless steel hardware
- Wall flowrate: 1120 GPM
- Floor flowrate: 1432 GPM
- Life: 15 years – submerged outlet
- Covers up to 24" x 24" main drain
- Certified unblockable
- Certified to cover up to 12" drain pipe ; floor flow rate 1504 GPM

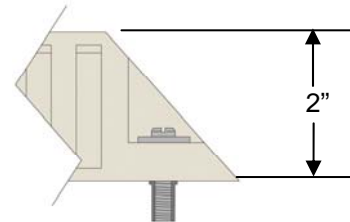

1/4" dia S.S. drop-in anchors with 1/4" S.S. fasteners & washers



Part #	Overall Size L x W	Open Area	Max. Flow Rate @ 1.5 F.P.S.
3030AEC	30"X30"	128.21 in <sup>2</sup>	600 GPM

PG-6-6  
R-6/18/09